


Certificate of Compliance

Certificate Number **EX5202**
Report Reference **January 20, 2009**
Issue Date **2009 April 16**

Page 1 of 3



Issued to: **Yong Won E N C Ltd.**
Jeil Bldg. 5th FL. ** 44-35 Yoyoido-Dong
Yungdeungpo-Gu Seoul ** 150-080 Republic of Korea


This is to certify that representative samples of **Flexible Sprinkler Hose with Fittings:**
***** SEE ADDENDUM PAGES *****

Have been investigated by Underwriters Laboratories Inc.® in accordance with the Standard(s) indicated on this Certificate.

Standard(s) for Safety: The basic standard used to investigate products in this category is UL 2443 "Flexible Sprinkler Hose with Fittings for Fire Protection Service."

Additional Information: These flexible sprinkler hose with fittings are intended to be installed in accordance with the manufacturer's installation instructions dated January, 2009.

Only those products bearing the UL Listing Mark should be considered as being covered by UL's Listing and Follow-Up Service.

The UL Listing Mark generally includes the following elements: the symbol UL in a circle:  with the word "LISTED"; a control number (may be alphanumeric) assigned by UL; and the product category name (product identifier) as indicated in the appropriate UL Directory.

Look for the UL Listing Mark on the product

Issued by:

Tracey Milton
Underwriters Laboratories Inc.

A handwritten signature in black ink that reads 'Tracey Milton'.

Reviewed by:


Daniel Weaver
Underwriters Laboratories Inc.

A handwritten signature in black ink that reads 'Daniel Weaver'.

Certificate of Compliance

Certificate Number **EX5202**
 Report Reference **January 20, 2009**
 Issue Date **2009 April 16**

Page 2 of 3

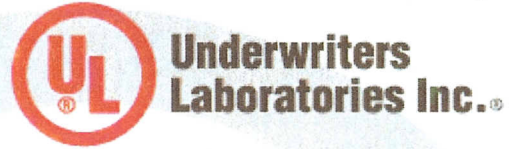

This is to verify that representative samples of the product as specified on this certificate were tested according to the current UL requirements.

Model	Rated Pressure, psig	Nom. Max. Ambient Temp of	Inlet by Outlet Size, in.	Assembly Length, ft (mm)	Max. No. of 90o Bends	Min. Bend Radius, in.	Equivalent Length of 1 in. Schedule 40	Flexibility Type
YN25-700	200	300	1x1/2	2.3 (700)	2	3	22	Limited
YN25-1000	200	300	1x1/2	3.3 (1000)	2	3	32	Limited
YN25-1200	200	300	1x1/2	3.9 (1200)	2	3	41	Limited
YN25-1500	200	300	1x1/2	4.9 (1500)	2	3	49	Limited
YN25-1800	200	300	1x1/2	5.9 (1800)	3	3	67	Limited
YB25-700	200	300	1x1/2	2.3 (700)	2	3	22	Limited
YB25-1000	200	300	1x1/2	3.3 (1000)	2	3	32	Limited
YB25-1200	200	300	1x1/2	3.9 (1200)	2	3	41	Limited
YB25-1500	200	300	1x1/2	4.9 (1500)	2	3	49	Limited
YB25-1800	200	300	1x1/2	5.9 (1800)	3	3	67	Limited
YB28-700	200	225	1x1/2	2.3 (700)	2	3	10	Limited
YB28-1000	200	225	1x1/2	3.3 (1000)	2	3	16	Limited
YB28-1200	200	225	1x1/2	3.9 (1200)	2	3	20	Limited
YB28-1500	200	225	1x1/2	4.9 (1500)	2	3	23	Limited
YB28-1800	200	225	1x1/2	5.9 (1800)	3	3	32	Limited

table cont'd

Issued by:

Tracey Milton *Tracey Milton*
 Underwriters Laboratories Inc.

Reviewed by:

Daniel Weaver *Daniel Weaver*
 Underwriters Laboratories Inc.

Certificate of Compliance

Certificate Number **EX5202**
 Report Reference **January 20, 2009**
 Issue Date **2009 April 16**

Page 3 of 3



This is to verify that representative samples of the product as specified on this certificate were tested according to the current UL requirements.

Model	Rated Pressure, psig	Max. Ambient Temp of F	Nom. Inlet by Outlet Size, in.	Assembly Length, ft (mm)	Max. No. of 90o Bends	Min. Bend Radius, in.	Equivalent Length of 1 in. Schedule 40	Flexibility Type
YN25-700	200	300	1x3/4	2.3 (700)	2	3	28	Limited
YN25-1000	200	300	1x3/4	3.3 (1000)	2	3	38	Limited
YN25-1200	200	300	1x3/4	3.9 (1200)	2	3	48	Limited
YN25-1500	200	300	1x3/4	4.9 (1500)	2	3	54	Limited
YN25-1800	200	300	1x3/4	5.9 (1800)	3	3	74	Limited
YB25-700	200	300	1x3/4	2.3 (700)	2	3	28	Limited
YB25-1000	200	300	1x3/4	3.3 (1000)	2	3	38	Limited
YB25-1200	200	300	1x3/4	3.9 (1200)	2	3	48	Limited
YB25-1500	200	300	1x3/4	4.9 (1500)	2	3	54	Limited
YB25-1800	200	300	1x3/4	5.9 (1800)	3	3	74	Limited
YB28-700	200	225	1x3/4	2.3 (700)	2	3	16	Limited
YB28-1000	200	225	1x3/4	3.3 (1000)	2	3	23	Limited
YB28-1200	200	225	1x3/4	3.9 (1200)	2	3	25	Limited
YB28-1500	200	225	1x3/4	4.9 (1500)	2	3	28	Limited
YB28-1800	200	225	1x3/4	5.9 (1800)	3	3	38	Limited

Issued by:

Tracey Milton
 Underwriters Laboratories Inc.

Tracey Milton

Reviewed by:

Daniel Weaver
 Underwriters Laboratories Inc.

Daniel Weaver
tyw